

ENGINE-DRIVEN PORTABLE HIGH PRESSURE PUMPS

*Cast Aluminum Self-Priming
Engine-Driven Pumps Provides Home
Fire Protection with Optional Hose Kit*

- Available with Honda, Briggs & Stratton Gasoline, or Hatz Diesel Engine
- Discharge Port Rotates in 90° Increments
- 2" Suction and Discharge Port Sizes
- Cast Aluminum
- Max. Flow: 130 GPM
- Max. Head: 108 PSI
- Max. Lift: 26 ft.
- EPDM Seals
- **One Tool Serviceability**
- Use for Fire Protection or Irrigation
- Optional High Pressure Hose Kit
- Optional Viton® Seal & Elastomers
- Optional Wheel Kit



High Pressure Hose Kit 55-338

Use for fire protection or irrigation. Available with a wide choice of standard and heavy duty gasoline and diesel fueled engines. Unit is standard with die-cast aluminum housing and cast-iron impeller. All Models standard with EPDM elastomers and seals. Many models are readily available "Off-the Shelf" for fast 24 hour shipment. For use with non-flammable liquids which are compatible with pump component materials.


Viton® and Teflon® are registered trademarks of E.I. DuPont.

COMMERCIAL DUTY



Model 2P5XHR

Performance of High Pressure Pumps

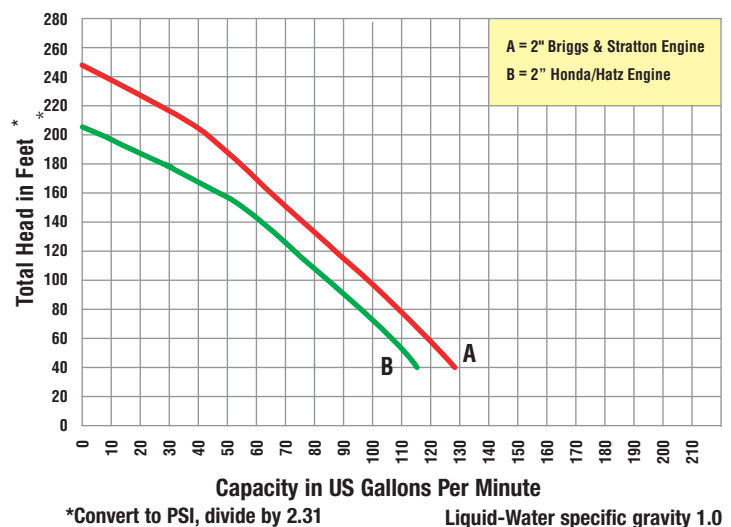


PORTABLE HIGH PRESSURE PUMPS

2" GENERAL PURPOSE-HIGH PRESSURE PUMPS

ALUM. MODEL	SHIP WT.	CURVE	DRIVER	SEAL TYPE & ELASTOMER/FACES	TANK SIZE (QTS.)	RUN TIME	MOUNTING
2P5XA	68 lbs.	A	B&S CP650	EPDM/CAR/CER	3	120	Handle
2P5XAR	90 lbs.	A	B&S CP650	EPDM/CAR/CER	3	120	Roll Cage
2P5XHR	86 lbs.	B	Honda GX160	EPDM/CAR/CER	3.88	100	Roll Cage
2P5XZR	107 lbs.	B	Hatz Diesel L48	EPDM/CAR/CER	3.1	110	Roll Cage

2" HIGH PRESSURE HOSE KIT

MODEL	SHIP WT.
55-338 (100 ft.)	38 lbs.

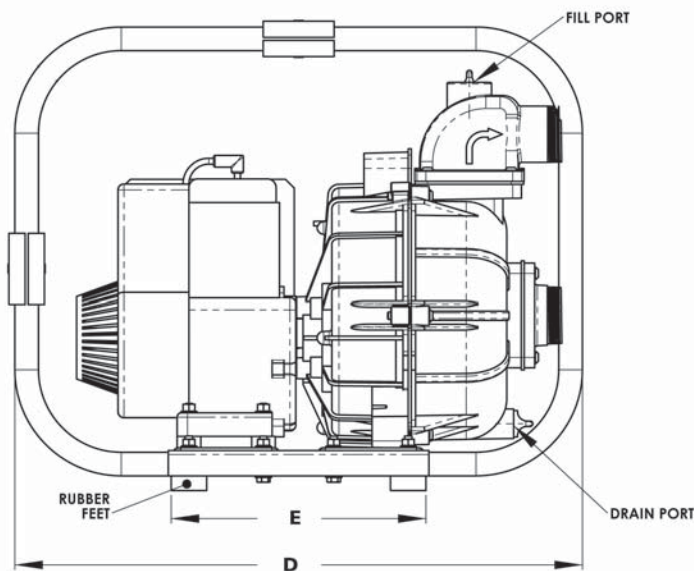

GAS ENGINE-DRIVEN PUMPS

MODEL	"H"
2P5X?R	7.4 (188)

DIESEL ENGINE-DRIVEN PUMPS

MODEL	"H"
2P5X?R	7.9 (200)

DIMENSIONS:
INCHES

(MILLIMETERS)

MODEL	A	B	C	D	E	F	SUC.*	DIS.*
2P5X	18.75 (476)	18 (457)	7.7 (195)	24 (610)	10.8 (274)	7.5 (190)	*2.00	*2.00

(*) STANDARD NPT (MALE) PIPE THREAD.

HIGH PRESSURE PUMP

Standard Features:

- Aluminum Closed Impeller and Cast Iron Volute - Die Cast Aluminum Pump
- Large Pump Casing
- Built-In Check Valve
- Removable/Replaceable Cast Iron Suction/Discharge Flanges
- Rotatable Discharge Port in 90° Increments
- EPDM Seal with Carbon and Ceramic Faces
- One Tool Serviceability, Tool Included with Engine-Driven Models
- Choice of Briggs & Stratton, Honda Gasoline or Hatz Diesel Engines
- Optional Wheel Kit
- Optional Viton® Seals and Elastomers
- Strainer Supplied
- Rubber Foot Mounting
- Maximum Temperature 180°F
- Pedestal Versions Available

WARNING: Do not use in explosive atmosphere or for pumping volatile flammable liquids.

